

MiaSolé FLEX SERIES—03NS

CIGS Flexible Modules: High Power Density in a Flexible Form Factor

KEY FEATURES


- ▶ Record efficiency levels in a CIGS flexible form factor
- ▶ Low installed weight at less than 2.2 kg/m² (<0.5 lb/ft²)
- ▶ No penetrations, ballast or racking required
- ▶ Applicable for high wind load and high seismic hazard areas
- ▶ Bypass diodes reduce PV system shading losses
- ▶ Directly bonds to many approved surfaces

RELIABILITY AND SAFETY

- ▶ IEC 61646 & IEC 61730
- ▶ UL 1703

WARRANTY


- ▶ 5 year workmanship
- ▶ 10/25 year warranty against power loss

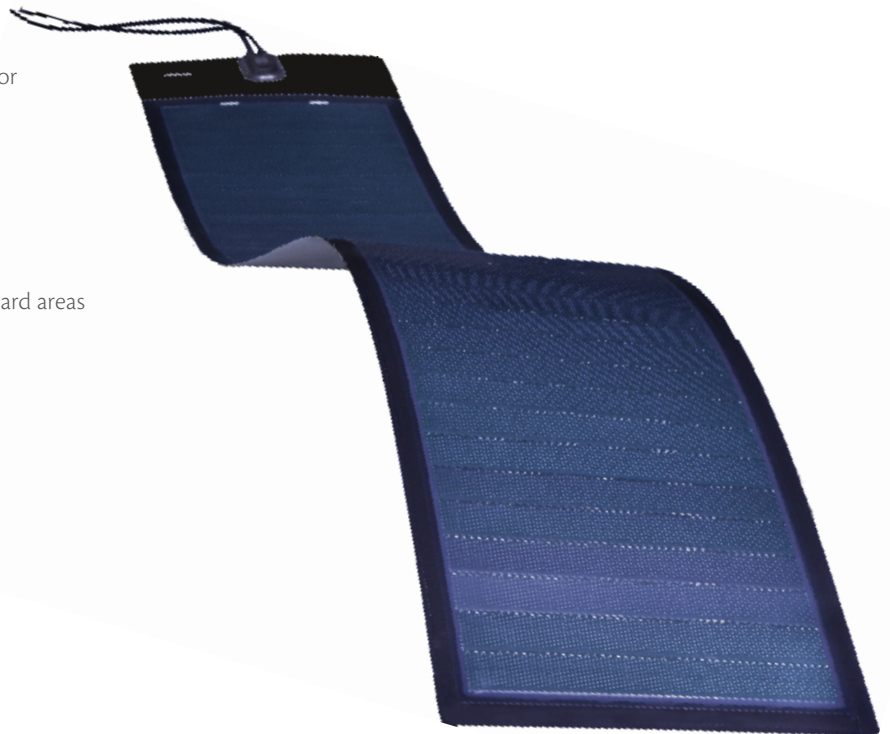

MiaSolé FLEX SERIES

FLEX-03NS SERIES CIGS MODULE

ELECTRICAL PERFORMANCE AT STC¹

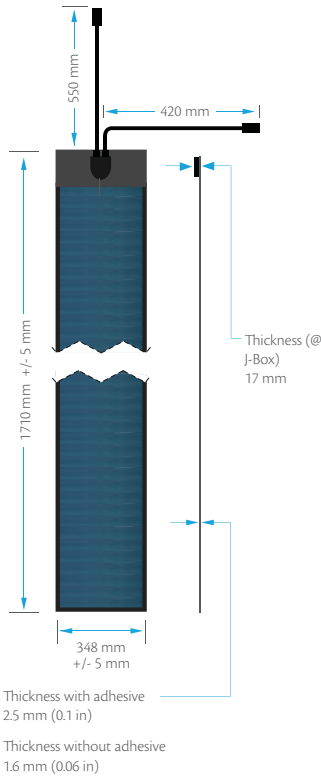

			FLEX-03 70NS	FLEX-03 75NS	FLEX-03 80NS	FLEX-03 85NS
Nominal Power	P_{MPP}	[W]	70	75	80	85
Aperture Efficiency	η	[%]	14.3%	15.3%	16.3%	17.3%
Power Output Tolerance		[W]	+5/-0	+5/-0	+5/-0	+5/-0
Maximum Power Voltage	V_{MPP}	[V]	18.3	18.8	19.3	19.8
Maximum Power Current	I_{MPP}	[A]	3.85	4.00	4.15	4.30
Open Circuit Voltage	V_{OC}	[V]	23.5	23.7	24.0	24.3
Short Circuit Current	I_{SC}	[A]	4.70	4.70	4.70	4.70
Maximum Series Fuse Rating		[A]	10			
Maximum System Voltage (IEC/UL)		[V]	1000/1000			

¹Standard Test Conditions (STC): 1000 W/m², 25°C cell temperature, AM 1.5 spectrum

THERMAL CHARACTERISTICS

NOCT	[°C]	48
Temperature Coefficient of P_{MPP}	[%/°C]	-0.38
Temperature Coefficient of V_{OC}	[%/°C]	-0.28
Temperature Coefficient of I_{SC}	[%/°C]	0.008

PHYSICAL AND MECHANICAL SPECIFICATIONS

Length	1710 mm (67.3 in)
Width	348 mm (13.7 in)
Thickness, Maximum at J-Box*, Module	17 mm (0.7 in), 2.5 mm (0.1 in)
Weight (Module without adhesive)	1.1 kg (2.4 lb)
Weight (Module with adhesive)	1.3 kg (2.9 lb)
Weight/Area (Module without adhesive)	1.8 kg/m ² (0.4 lb/ft ²)
Weight/Area (Module with adhesive)	2.2 kg/m ² (0.5 lb/ft ²)
Junction Box Type	IP68
Cable Connections	Amphenol H ₄
Cell Type	Copper Indium Gallium Diselenide (CIGS)
Warranty**	5 year workmanship; 10/25 year power output
Certifications	UL 1703, IEC 61646, IEC 61730
Packaging Info	10 modules per crate, 80 modules per pallet

*2.5 mm (0.1 in) for the rest of the module with adhesive

*1.6 mm (0.06 in) for the rest of module without adhesive

**Please see full warranty for details



2590 Walsh Avenue, Santa Clara, California 95051, USA
1.408.919.5700 info@miasole.com www.miasole.com

MiaSolé and the MiaSolé logo are registered trademarks.
©2017 MiaSolé. All rights reserved. Specifications included in this datasheet are subject to change without notice.
MiaSolé Approved for Public Release.
Part Number 990-199308-00_1